


COFFRETS ANTIDEFLAGRANT EJB UL
FLAMEPROOF ENCLOSURES EJB UL

NEC – NEMA 4, 7, 9 - IP66
Class I – Group B, C, D / Class II - Group E, F, G / Class III

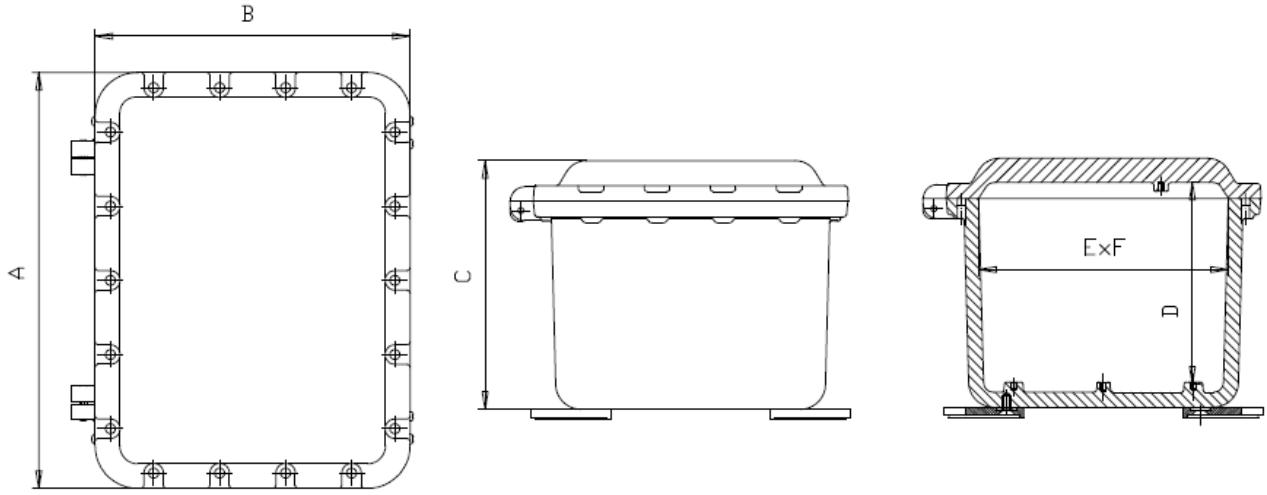

Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Platine (mm)	Poids (Kg)
EJB21 UL	320	280	182	123	220	180	180x140	13,50
EJB31 UL	450	350	253	187	350	250	325x225	27,00
EJB51 UL	600	400	240	195	490	290	460x260	52,50
EJB61 UL	710	500	384	295	580	370	560x360	114,00
EJB63 UL	710	500	200	165	580	370	560x360	92,00

CARACTERISTIQUES TECHNIQUES
Protection : 4, 7 BCD, 9 EFG
Type homologué : EJB UL
Certifications et Approbations :
UL Standard 1233 -4° Ed. (15 Sett. 2006)
Explosion-proof / Dust-Ignition-Proof
Electrical Equipment for use un Hasardous (Classified) Locations
Degré de protection : IP66
Température ambiante : –20°C +40°C
Matière : Aluminium Peinture RAL 9006 (Gris)
Usinages de M20 à M90 - 1/2NPT à 4''NPT

APPLICATION :
Boite à bornes, Postes de commande (sans éléments de façade).
Equipement interne : contacteurs, discontacteurs, transformateurs, automates, modules entrées / sorties déportées, sectionneurs, sectionneurs fusibles, disjoncteurs, platines électronique, relais, thermostats, indicateurs numériques, compteurs, minuteries.

SUR DEMANDE :
Autres coloris

TECHNICAL CHARACTERISTICS
Protection : 4, 7 BCD, 9 EFG
Type approved : EJB UL
Certifications and Approvals:
UL Standard 1233 -4° Ed. (15 Sett. 2006)..
Explosion-proof / Dust-Ignition-Proof
Electrical Equipment for use un Hasardous (Classified) Locations
Degree of protection : IP66
Ambient temperature : –20°C +40°C
Material : Aluminium alloy (copper free) Painting RAL9006 (Grey)
Machining of M20 at M90 - 1/2NPT at 4''NPT

APPLICATION :
Terminal box, control stations (without front elements).
Indoor equipment: contactors, overcurrent breakers, transformers, controllers, modules remote I / O, disconnectors fuses, circuit breakers, printed circuit board, relays, thermostats, digital indicators, counters, timers.

ON REQUEST :
Other colors

ZA Sud – 16 rue du Cedec - 89120 CHARNY - France
☎: +33 (0)3 86 63 64 01 - 🖷: +33 (0)3 86 63 64 87 - ✉: contact@adf-service.com - 💻: www.adf-service.com

NOUS NOUS RESERVONS LE DROIT DE REVISER SANS PREAVIS LES CARACTERISTIQUES DE NOS PRODUITS
WE RESERVE THE RIGHT TO REVISE WITHOUT NOTICE OF THE FEATURES OF PRODUCTS